

Paper based printed electrochemical biosensors for POCT

¹Mutinati, G.C.; ¹Heer, R.; ¹Melnik, E.; ¹Kataeva, N.; ¹Schotter, J.; ¹Hainberger R.; ²Schobesberger, P.; ²Sikic, B.; ²Engelbrecht, G.; ³Holweg, G.; ³Herndl, T.; ⁴Brunbauer, E.; ⁵Heilmann, M.; ⁵Ide, D.; ⁵Padinger, F.

¹AIT Austrian Institute of Technology GmbH, H&E Department, BU Molecular Diagnostics, Vienna, Austria
²DPI Holding GmbH, Vienna, Austria
³Infineon Technologies Austria AG, Design & Development Center, Graz, Austria
⁴Lenzing Papier GmbH, Lenzing, Austria
⁵SCIO Holding GmbH, Linz, Austria

Giorgio.Mutinati@ait.ac.at

MOTIVATION


Due to the rapid development in the areas of "Internet of Things" and ubiquitous sensor networks, more and more products with a short period of usage are emerging. In this context, aspects of environment-friendly production and disposal are becoming increasingly important. Particular attention has to be put on single-use products that are produced in very large volumes. Especially in this area, the paper and printing industry already has long standing expertise. At present, non-invasive point-of-care rapid tests are mostly available in the form of test strips using color indicators. The reading of these test strips is strongly influenced by the subjective visual perception and the results are, therefore, only qualitative.

Technologies

| | | |
|---|--|---|
| <p><u>Paper manufacturing</u></p> <ul style="list-style-type: none"> Cellulose matrix for biofunctionalisation Surface for electrodes | <p><u>Roll-to-roll printing</u></p> <ul style="list-style-type: none"> Electrodes Hydrophobic barriers | <p><u>Microelectronics</u></p> <ul style="list-style-type: none"> Printed antenna Assembly of bare dies |
|---|--|---|

Innovation example

State of the art

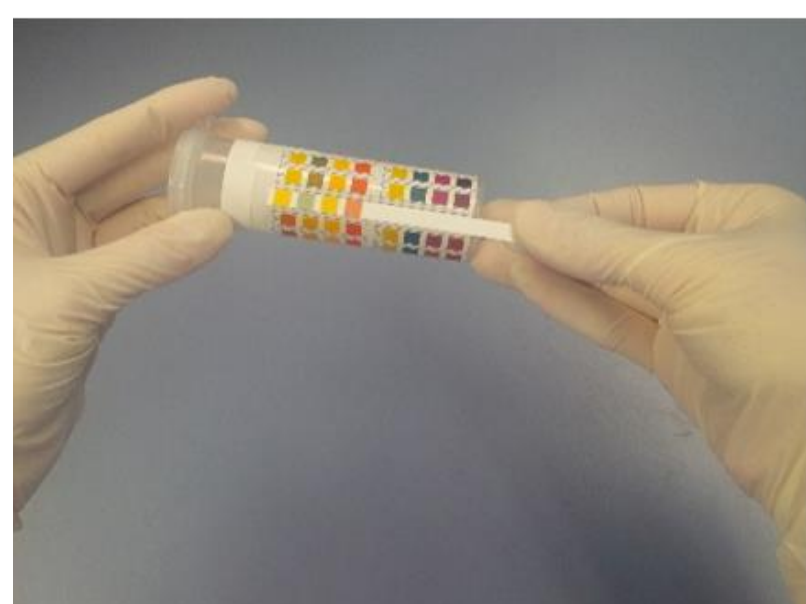

Urine test strips

- Plastic substrate
- Subjective visual perception
- No electronic data recording
- Not suitable e.g. for ketoacidosis



Electrochemical biosensing for the quantification of glucose and ketone bodies
 (beta-hydroxybutyric acid and acetoacetic acid)

PIONIER demonstrator


- Paper substrate
- Quantitative results
- Contactless read-out
- Battery-free
- Automatic data recording
- Environment-friendly

Single step biofunctionalisation

Material inkjet printer





Printable bioink formulation

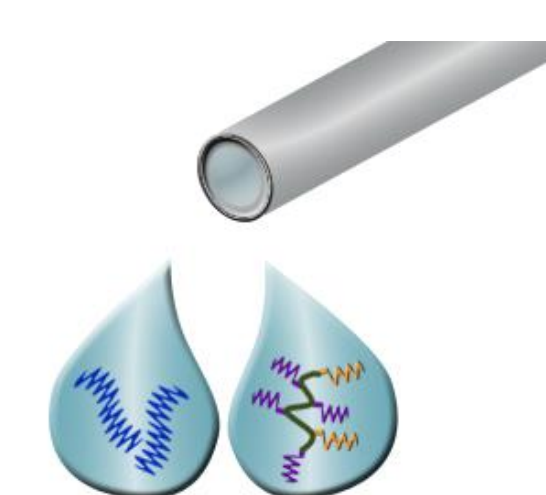

Key properties

- Viscosity
- Surface tension
- Biomolecule stability
- Chemical reactivity


Direct bioink printing process

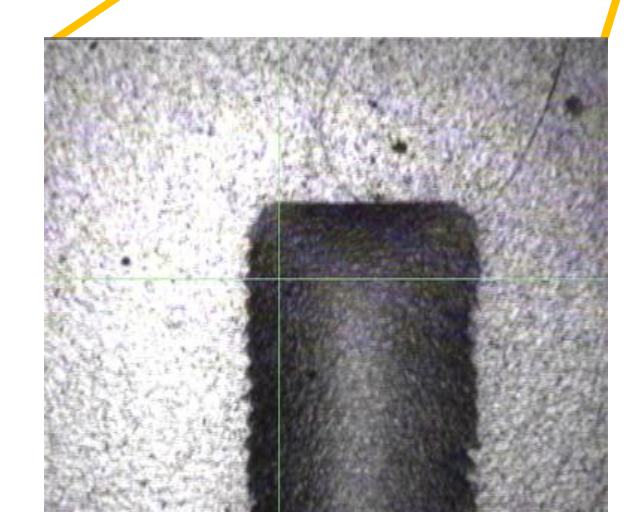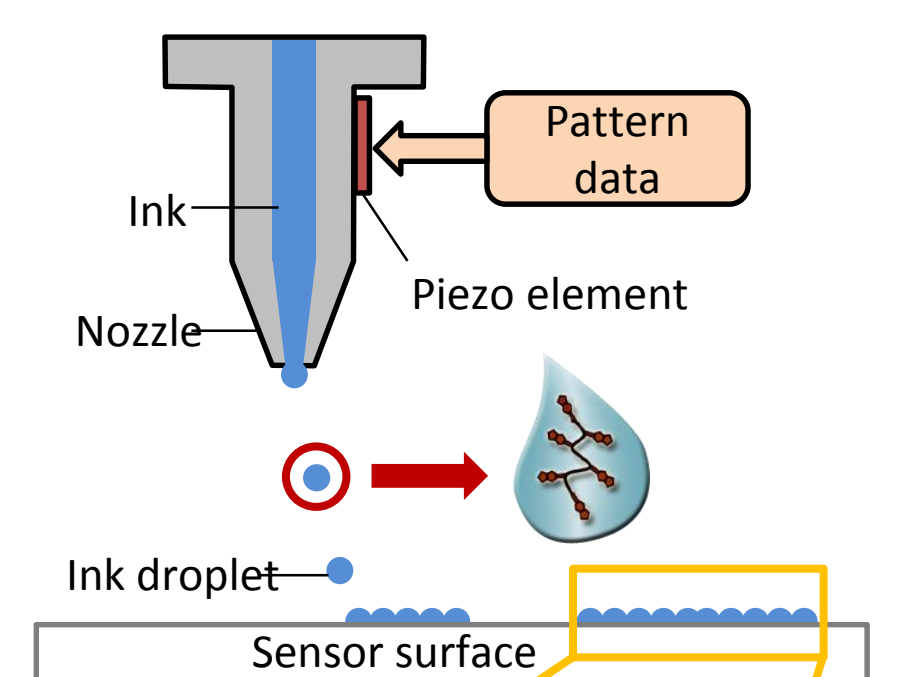

CONCEPT

Realisation of highly integrated biosensors for analysis in private environments, i.e. outside of diagnostic laboratories and medical service providers. We realise electrochemical sensors for the quantification of glucose and ketone bodies in urine as an application example. They serve as demonstrator for the research and technology development performed in the project and furthermore they are the basis for a first application with high market potential.

Integration

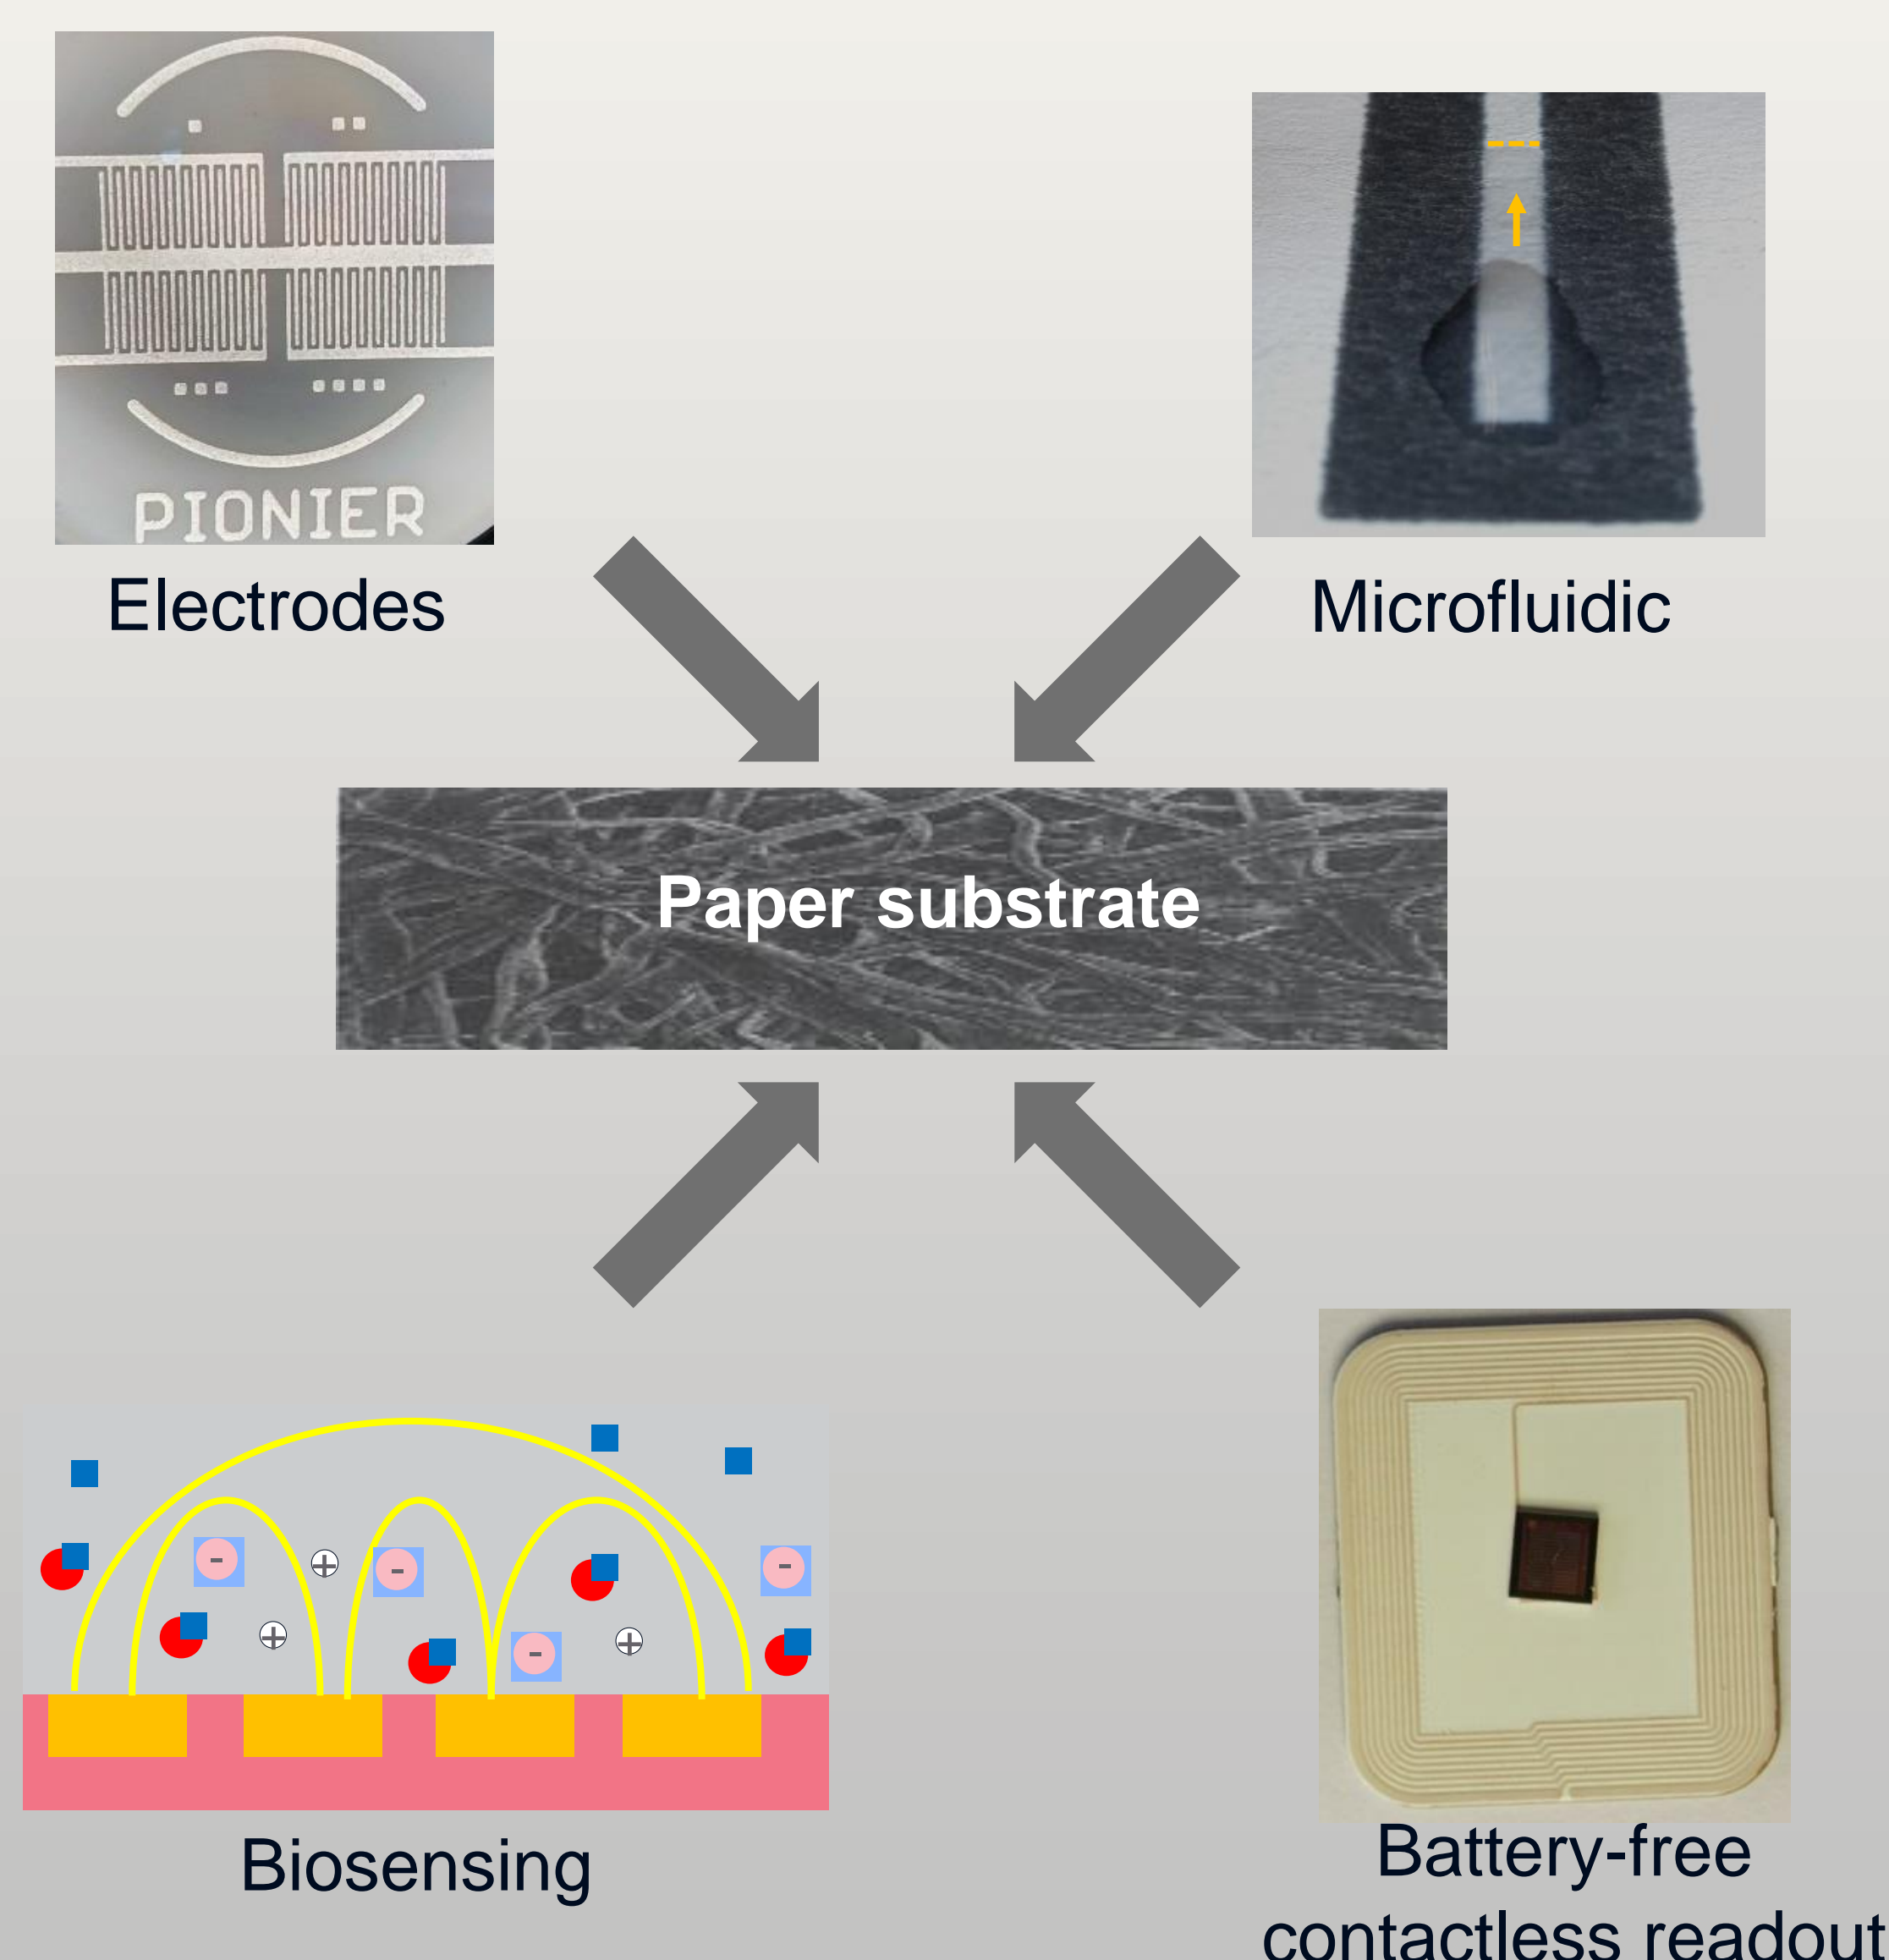

METHODOLOGY

We explore the integration of different processes to develop a paper-based biosensor platform for molecular diagnostic systems. For this purpose, suitable fabrication processes are developed: printing of electrodes, bioinks and hydrophobic barriers. The readout of the measurement values is accomplished contactless by integrating a small, battery-free near field communication (NFC) chip. This important aspect plays an essential role for environmentally disposal.